
CARTRIDGE HOUSINGS - STAINLESS STEEL

ORDERING INFORMATION

To create your ordering part number, use the part number configurator below. Custom configurations available. Please contact customer service.

EXAMPLE: CFHC-3 x 10"

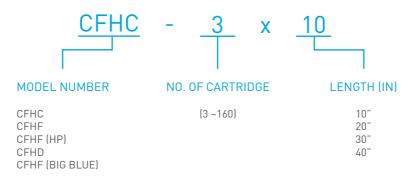

CFHC (CLAMP TYPE) / WORKING PRESSURE: 100 PSI

	MODEL DESCRIPTION	RECOMMENDED FLOW @ 1.0 M3/HR PER 10" CARTRIDGE - M3/HR (GPM)	NO OF CARTRIDGES	INLET/OUTLET OPENING	DRAIN - (NPT FEMALE)	VENT - (NPT FEMALE)	INTERNAL DIAMETER (MM)
CFHC (Clamp Type)	/Working Pressure:100) PSI					
and the second s	CFHC - 3 x 10"	3.0 (13.2)	3 of 10" Long	1.5" (Threaded)	1/2"	1/4"	170
and the second second	CFHC - 3 x 20"	6.0 (26.4)	3 of 20" Long	1.5" (Threaded)	1/2"	1/4"	170
	CFHC - 3 x 30"	9.0 (39.6)	3 of 30" Long	2 " (Threaded)	1/2"	1/4"	170
	CFHC - 3 x 40"	12.0 (52.8)	3 of 40" Long	2" (Threaded)	1/2"	1/4"	170
	CFHC - 5 x 10"	5.0 (22.2)	5 of 10" Long	1.5" (Threaded)	1/2"	1/4"	200
	CFHC - 5 x 20"	10.0 (44.0)	5 of 20" Long	1.5" (Threaded)	1/2"	1/4"	200
	CFHC - 5 x 30"	15.0 (66.0)	5 of 30" Long	1.5" (Threaded)	1/2"	1/4"	200
	CFHC - 5 x 40"	20.0 (88.0)	5 of 40" Long	2" (Threaded)	1/2"	1/4"	200
	CFHC - 7 x 10"	7.0 (30.8)	7 of 10" Long	2" (Threaded)	1/2"	1/4"	250
	CFHC - 7 x 20"	14.0 (61.6)	7 of 20" Long	2" (Threaded)	1/2"	1/4"	250
	CFHC - 7 x 30"	21.0 (92.4)	7 of 30" Long	2.5" (Threaded)	1/2"	1/4"	250
	CFHC - 7 x 40"	28.0 (123.2)	7 of 40" Long	2.5" (Threaded)	1/2"	1/4"	250

CFHF (FLANGE TYPE) / WORKING PRESSURE: 100 PSI

CFHF (Flange Type) / Working Pressure:100 PSI								
	CFHF - 5 x 10"	5.0 (22.2)	5 of 10" Long	1.5" (Threaded)	1/2"	1/4"	200	
1 (1) 11	CFHF - 5 x 20"	10.0 (44.0)	5 of 20" Long	1.5" (Threaded)	1/2"	1/4"	200	
	CFHF - 5x 30"	15.0 (66.0)	5 of 30" Long	2" (Threaded)	1/2"	1/4"	200	
	CFHF - 5x 40"	20.0 (88.0)	5 of 40" Long	2" (Threaded)	1/2"	1/4"	200	
	CFHF - 7 x 10"	7.0 (30.8)	7 of 10" Long	2" (Threaded)	1/2"	1/4"	250	
	CFHF - 7 x 20"	14.0 (61.6)	7 of 20" Long	2" (Threaded)	1/2"	1/4"	250	
	CFHF - 7 x 30"	21.0 (92.4)	7 of 30" Long	2.5" (Threaded)	1/2"	1/4"	250	
	CFHF - 7 x 40"	28.0 (123.2)	7 of 40" Long	2.5" (Threaded)	1/2"	1/4"	250	
	CFHF - 11 x 30"	33.0 (145.2)	11 of 30" Long	3" (Flanged)	1/2"	1/4"	300	
	CFHF - 11 x 40"	44.0 (193.6)	11 of 40" Long	3" (Flanged)	1/2"	1/4"	300	
	CFHF - 15 x 30"	45.0 (198.0)	15 of 30" Long	3" (Flanged)	3/4"	1/4"	350	
	CFHF - 15 x 40"	60.0 (264.0)	15 of 40" Long	3" (Flanged)	3/4"	1/4"	350	
	CFHF - 19 x 30"	57.0 (250.8)	19 of 30" Long	3" (Flanged)	3/4"	1/4"	400	
	CFHF - 19 x 40"	76.0 (334.4)	19 of 40" Long	3" (Flanged)	3/4"	1/4"	400	

CFHF (HP) - FLANGE TYPE, HIGH PRESSURE / WORKING PRESSURE: 150 PSI

	MODEL DESCRIPTION	RECOMMENDED FLOW @ 1.0 M3/HR PER 10" CARTRIDGE - M3/HR (GPM)	NO OF CARTRIDGES	INLET/OUTLET OPENING	DRAIN - (NPT FEMALE)	VENT - (NPT FEMALE)	INTERNAL DIAMETER (MM)
CFHF(HP) – Flange	Type, High Pressure / Wor	king Pressure:150 PSI (He	ousing <7 element	s comes with hing	e joint)		
	CFHF(HP) - 5 x 10"	5.0 (22.2)	5 of 10" Long	1.5" (Flanged)	1/2"	1/4"	200
	CFHF(HP) - 5 x 20"	10.0 (44.0)	5 of 20" Long	1.5" (Flanged)	1/2"	1/4"	200
a Rea - Come a	CFHF(HP) - 5 x 30"	15.0 (66.0)	5 of 30" Long	2" (Flanged)	1/2"	1/4"	200
	CFHF(HP) - 5 x 40"	20.0 (88.0)	5 of 40" Long	2" (Flanged)	1/2"	1/4"	200
	CFHF(HP) - 7 x 10"	7.0 (30.8)	7 of 10" Long	2" (Flanged)	1/2"	1/4"	250
	CFHF(HP) - 7 x 20"	14.0 (61.6)	7 of 20" Long	2" (Flanged)	1/2"	1/4"	250
13. C. 17 11	CFHF(HP) - 7 x 30"	21.0 (92.4)	7 of 30" Long	2.5" (Flanged)	1/2"	1/4"	250
A	CFHF(HP) - 7 x 40"	28.0 (123.2)	7 of 40" Long	2.5" (Flanged)	1/2"	1/4"	250
	CFHF(HP) - 11 x 30"	33.0 (145.2)	11 of 30" Long	3" (Flanged)	1/2"	1/4"	300
de la companya de la	CFHF(HP) - 11 x 40"	44.0 (193.6)	11 of 40" Long	3" (Flanged)	1/2"	1/4"	300
•	CFHF(HP) - 15 x 30"	45.0 (198.0)	15 of 30" Long	4" (Flanged)	3/4"	1/4"	350
	CFHF(HP) - 15 x 40"	60.0 (264.0)	15 of 40" Long	4" (Flanged)	3/4"	1/4"	350
	CFHF(HP) - 19 x 30"	57.0 (250.8)	19 of 30" Long	4" (Flanged)	3/4"	1/4"	400
	CFHF(HP) - 19 x 40"	76.0 (334.4)	19 of 40" Long	4" (Flanged)	3/4"	1/4"	400
	CFHF(HP) - 27 x 30"	81.0 (356.4)	27 of 30" Long	4" (Flanged)	3/4"	1/4"	450
	CFHF(HP) - 27 x 40"	108.0 (475.2)	27of 40" Long	4" (Flanged)	3/4"	1/4"	450

CFHD (DAVIT TYPE) / WORKING PRESSURE: 150 PSI

CFHD (Davit Type) /	Working Pressure:150 PS	I					
	CFHD - 11 x 30"	33.0 (145.2)	11 of 30" Long	3" (Flanged)	1/2"	1/4"	300
	CFHD - 11 x 40"	44.0 (193.6)	11 of 40" Long	3" (Flanged)	1/2"	1/4"	300
	CFHD - 15 x 30"	45.0 (198.0)	15 of 30" Long	4" (Flanged)	3/4"	1/4"	350
	CFHD - 15 x 40"	60.0 (264.0)	15 of 40" Long	4" (Flanged)	3/4"	1/4"	350
	CFHD - 19 x 30"	57.0 (250.8)	19 of 30" Long	4" (Flanged)	3/4"	1/4"	400
	CFHD - 19 x 40"	76.0 (334.4)	19 of 40" Long	4" (Flanged)	3/4"	1/4"	400
	CFHD - 27 x 30"	81.0 (356.4)	27 of 30" Long	4" (Flanged)	3/4"	1/4"	450
-	CFHD - 27 x 40"	108.0 (475.2)	27 of 40" Long	4" (Flanged)	3/4"	1/4"	450
	CFHD - 30 x 30"	90.0 (396.0)	30 of 30" Long	4" (Flanged)	1"	1/4"	500
200 200	CFHD - 30 x 40"	120.0 (528.0)	30 of 40" Long	4" (Flanged)	1"	1/4"	500
the state	CFHD - 36 x 30"	108.0 (475.2)	36 of 30" Long	4" (Flanged)	1"	1/4"	550
	CFHD - 36 x 40"	144.0 (633.6)	36 of 40" Long	4" (Flanged)	1"	1/4"	550
	CFHD - 40 x 30"	120.0 (528.0)	40 of 30" Long	4" (Flanged)	1"	1/4"	600
	CFHD - 40 x 40"	160.0 (704.0)	40 of 40" Long	4" (Flanged)	1"	1/4"	600
	CFHD - 50 x 30"	150.0 (660.0)	50 of 30" Long	5" (Flanged)	1"	1/4"	650
	CFHD - 50 x 40"	200.0 (880.0)	50 of 40" Long	5" (Flanged)	1"	1/4"	650
Fille	CFHD - 60 x 30"	180.0 (792.0)	60 of 30" Long	6" (Flanged)	1"	1/4"	700
	CFHD - 60 x 40"	240.0 (1056.0)	60 of 40" Long	6" (Flanged)	1"	1/4"	700
	CFHD - 75 x 30"	225.0 (990.0)	75 of 30" Long	6" (Flanged)	1.5"	1/4"	750
	CFHD - 75 x 40"	300.0 (1320.0)	75 of 40" Long	6" (Flanged)	1.5"	1/4"	750
	CFHD - 80 x 30"	240.0 (1056.0)	80 of 30" Long	6" (Flanged)	1.5"	1/4"	800
	CFHD - 80 x 40"	320.0 (1408.0)	80 of 40" Long	6" (Flanged)	1.5"	1/4"	800
	CFHD - 100 x 30"	300.0 (1320.0)	100 of 30" Long	6" (Flanged)	1.5"	1/4"	900
	CFHD - 100 x 40"	400.0 (1760.0)	100 of 40" Long	6" (Flanged)	1.5"	1/4"	900
	CFHD - 120 x 30"	360.0 (1584.0)	120 of 30" Long	8" (Flanged)	1.5"	1/4"	1000
	CFHD - 120 x 40"	480.0 (2112.0)	120 of 40" Long	8" (Flanged)	1.5"	1/4"	1000
	CFHD - 140 x 30"	420.0 (1848.0)	140 of 30" Long	8" (Flanged)	2"	1/4"	1100
	CFHD - 140 x 40"	560.0 (2464.0)	140 of 40" Long	8" (Flanged)	2"	1/4"	1100
	CFHD - 160 x 30"	480.0 (2112.0)	160 of 30" Long	8" (Flanged)	2"	1/4"	1200
	CFHD - 160 x 40"	640.0 (2816.0)	160 of 40" Long	8" (Flanged)	2"	1/4"	1200

CFHF (BIG BLUE) FILTER HOUSING / WORKING PRESSURE: 150 PSI

CFHF (BIG BLUE) / Working Pressure:150 PSI								
Ĩ.	CFHF (Dia - 4.5) 1 x 40"	30 (132)	1 of 40" Long	2" (Flanged)	1/2"	1/4"	200	
	CFHF (Dia - 4.5) 2 x 40"	60 (266)	2 of 40" Long	3" (Flanged)	3/4"	1/4"	400	
	CFHF (Dia - 4.5) 3 x 40"	90 (400)	3 of 40" Long	4" (Flanged)	3/4"	1/4"	500	
	CFHF (Dia - 4.5) 4 x 40"	120 (533)	4 of 40" Long	4" (Flanged)	1"	1/4"	550	
	CFHF (Dia - 4.5) 5 x 40"	150 (666)	5 of 40" Long	4" (Flanged)	1"	1/4"	600	